

R-SERIES

500/600



Our Slim line makes big impact



Transfrig's well estimated R-Series units provide a slim line and light weight over road refrigeration option.

The two piece units are suitable for bulk head or roof mount with or without electric standby.

FEATURES

ADVANTAGES

- R-Series units are available with or without electric standby, 220 V 1 phase available throughout the range
- Available in 12 V throughout the range
- Available in R404A, ozone friendly refrigerant

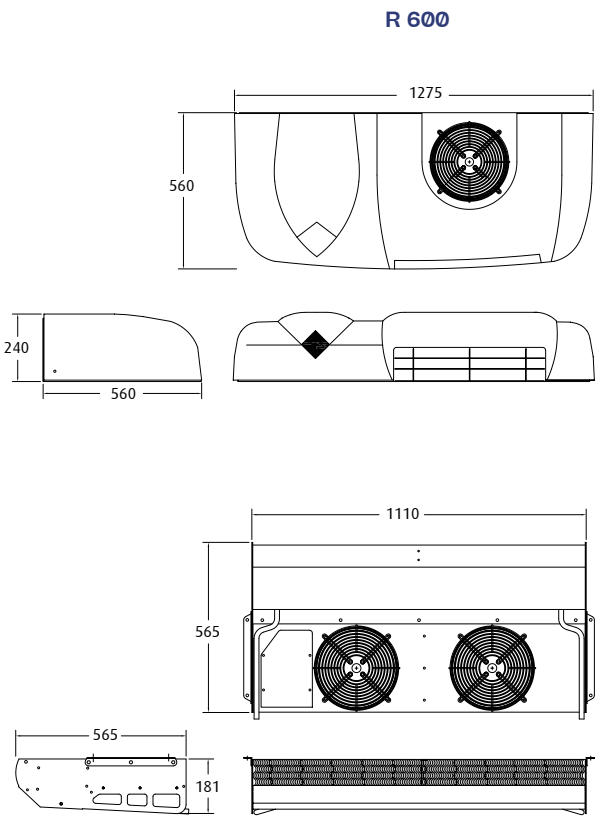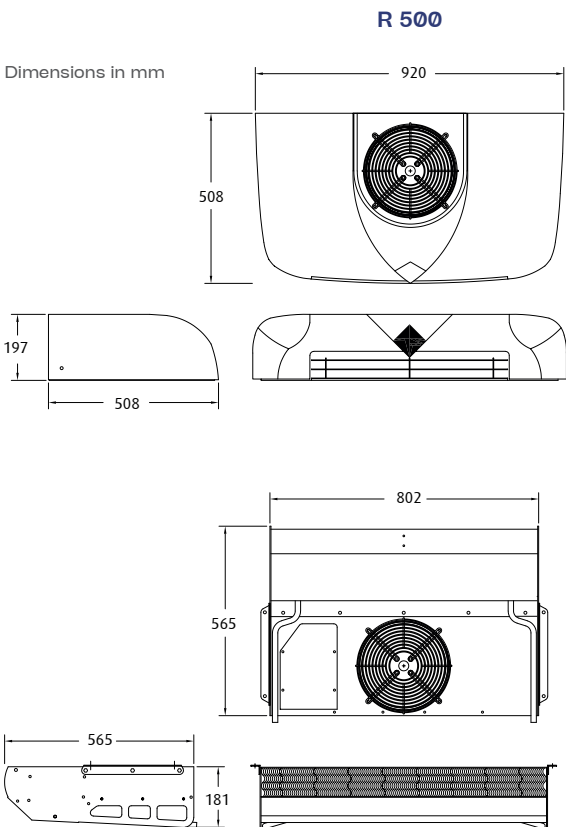

TECHNICAL DATA

			R 500	R 600
Cooling Capacity @30°C ambient R404A			kW	kW
	Road	0°C	2.3	3.1
		-20°C	1.5	1.8
	Electric	0°C	1.5	1.8
		-20°C	0.9	1.1
Air Volume Flow (m³/h)			1400	2200
Weight (kg)	Road only		65	70
	el. standby		115	120
Road Compressor			150 cc +- 5 %	160 cc
Electric Motor			50 Hz	50 Hz
	Power (kW)	220V 1ph	2.2	2.2
	Current	220V 1ph	14	14
	Consumption (A)			